


PE12H green 12x16mm² IP20 Earthing terminal

SKU	MAD1012G15
EAN	4744397015129
Color	Green
Wire material	Cu
Cross-section min. (mm ²)	1,5
Cross-section max. (mm ²)	16
Input wire min. (mm ²)	1,5
Input wire max. (mm ²)	16
Output wire min. (mm ²)	1,5
Output wire max. (mm ²)	16
Number of connections	12
Nominal current (A)	63
Nominal voltage (V)	690
Short-circuit resistance (kA/1s)	4,2 kA/1 s
Max. short-circuit current	I _{cw} =4,2 kA/1 s
Rated surge voltage (kV)	8
Service temperature (°C)	85
Material	Brass, polyamide PA6
Mounting method	DIN rail
Item width (mm)	14
Item length (mm)	88
Item height (mm)	32
Item weight (g)	45
Tightening torque (Nm)	2,5 Nm

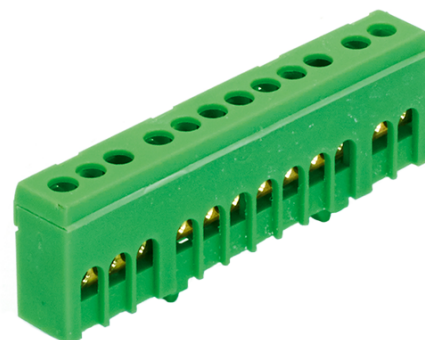

IP rating	IP20
Certification	EN 60998-1, EN 60998-2-1
Flame resistance	UL94 V2
CN8 code	85369001
Package quantity (pcs)	10