

MOREK

Creating a better future For You



Cable Accessories

Shear Bolt Connectors, Cable Lugs
and Heat-shrink Tubing

morek.eu 2026

Enabling electrical connections through top-quality products and true partnerships.

*Enabling electrical connections through top-quality
products and true partnerships.*

Our mission, ***Enabling electrical connections through high-quality products and true partnerships***, underscores our dedication to providing the best price-quality-support ratio in the industry. As we lead the global electrification landscape, we remain committed to sustainable growth, balancing people, nature, and resources, and prioritizing the wellbeing of individuals, teams, and communities.

With a presence across 10 European countries, we provide high-quality electrical components for B2B clients, including distributors, panel builders, and installers, with a focus on strategic partnerships.



Morek Finland



Morek Estonia



Morek Latvia



Morek Lithuania



Morek Poland



Morek Czech Republic



Morek Slovakia



Morek France



Morek Portugal





The Morek Cable Accessories catalog brings together a selection of reliable, high-quality products that ensure safe and efficient electrical connections for any installation.

The product portfolio in the Morek Cable Accessories catalog includes medium and heavy-wall tubing, thin-wall tubing, molded parts, low voltage kits, shear bolt connector kits, and gel-filled joint accessories. Each product reflects Morek's commitment to quality, innovation, and ease of use.

All products are crafted from durable materials and meet industry standards, allowing professionals to work with dependable solutions in both indoor and outdoor environments. Every connection made with Morek products represents quality and assurance, developed and tested for long-term durability.



Shear Bolt Cable Lugs and
Connectors
Pages 6-18



Heat-shrink Tubing
Pages 21-27



Moulded parts
Pages 28-30



Low voltage kit
Pages 31,32

Shear Bolt Cable Lugs and Connectors

Shear Bolt Cable Lugs up to 12 kV	6
Shear Bolt Cable Connectors up to 12 kV	9
Shear Bolt Cable Lugs up to 36kV	12
Shear Bolt Cable Connectors up to 36kV	16
Clamp device for screw connectors	18

Heat-shrink Tubing

Thinwall Tube (MTW)	21
List of products MTW available in different colors	
Mediumwall Tubing with adhesive (MMWT-A)	23
Mediumwall Tubing without adhesive (MMWT-U)	
Heavywall Tubing with adhesive (MHWT-A)	25
Heavywall Tubing without adhesive (MHWT-U)	

Moulded parts


Heat-shrink Low Voltage Breakouts (MHLB)	28
Heat-shrink End Caps (MHLC)	30

Low voltage kits

Low Voltage Termination Kits (MSLS)	31
Low Voltage Joint Kit (MSTS)	

Shear Bolt Cable Lugs up to 12 kV

Shear-bolt lugs for terminating aluminium or copper conductors, rated up to 12 kV. Also suitable for low-voltage applications (0,6/1 kV).

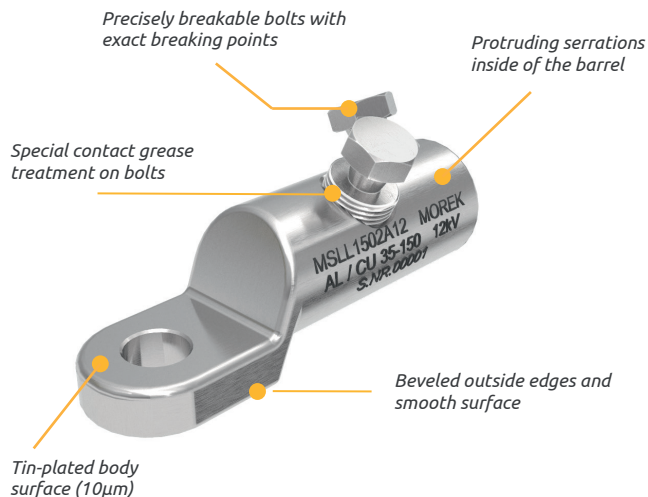

Morek's **Shear Bolt Cable Lugs** provide efficient and reliable termination for both aluminum and copper conductors tested in applications up to 12kV. Designed for simplicity and versatility, these lugs eliminate the need for crimping tools by using shear bolt technology, allowing installation with a standard wrench or spanner. The lugs are made from high-strength, tin-plated aluminum alloy and are coated with antioxidation grease, ensuring long-lasting performance and optimal conductivity.

Morek's Shear Bolt Cable Lugs are engineered for ease, reliability, and adaptability, offering a top-tier solution for terminating conductors without the need for specialized tools. With certified durability and compatibility, they are a practical choice for safe, efficient installations in diverse applications.

Compliance: Certified to EN 61238-1 Class A, suitable for applications with high short-circuit intensity.

Shear Bolt Technology:

Enables installation using basic tools, with no need for crimping or special equipment.

Range-Taking Design:

Accommodates conductors of various cross-sections, reducing the need for multiple lug sizes.

Durable and Safe Materials:

Made from high-strength, tin-plated aluminum alloy, suitable for aluminum and copper conductors.

Optimal Electrical Connection:

Shear bolts break at the exact torque required for reliable electrical performance.

Antioxidation Protection:

Bolts are treated with antioxidation grease, preventing corrosion and ensuring a clean electrical contact.

Indoor and Outdoor Compatibility:

Suitable for installations in both environments, supporting various conductor shapes and insulation types.

Morek's shear bolt lugs are tested to Class A under IEC 61238-1, ensuring their suitability for most industrial and electrical distribution networks. These compact lugs are compatible with widely-used termination kits and require minimal installation space, even for larger conductor sizes.



Palm opening size	MSLL35	MSLL50	MSLL51	MSLL70	MSLL95
M10	MSLL0351A10	MSLL0501A10	MSLL0502A10	-	-
M12	MSLL0351A12	MSLL0501A12	MSLL0502A12	MSLL0702A12	MSLL0951A12
M16	-	-	-	-	-

Technical data

Conductor cross-section Al (mm²)

RE  Round, solid	6 - 35	10 - 50	10 - 50	16 - 70	16 - 95
RM  Round, stranded	10 - 35	10 - 50	10 - 50	16 - 70	16 - 95
SE  Sector shaped, solid	35	35 - 50	35 - 50	35 - 70	35 - 95
SM  Sector shaped, stranded	35	35 - 50	35 - 50	35 - 70	35 - 95


Conductor cross-section Cu (mm²)


RM  Round, stranded	6 - 35	6 - 50	6 - 50	16 - 70	16 - 95
SM  Sector shaped, stranded	6 - 35	6 - 50	6 - 50	16 - 70	16 - 95
RE  Round, solid	6 - 35	6 - 35	6 - 35	23 - 35	16 - 35

No. of bolts Ø mm	1 / M10	1 / M10	2 / M10	2 / M12	1 / M12
Material of bolts	Al	Al	Al	Al	Al
L1 / L2 / l	53 / 40 / 18	62 / 51 / 28	62 / 51 / 30	90 / 75 / 40	65 / 52 / 24
W / D / d	24 / 16 / 9	25 / 20 / 11	25 / 20 / 11	28 / 22 / 12	25 / 25 / 14
Weight (g)	23	37	42	62	65
Package (pcs)	50	50	50	50	25

Suitable for aluminium and copper applications

Dimensions

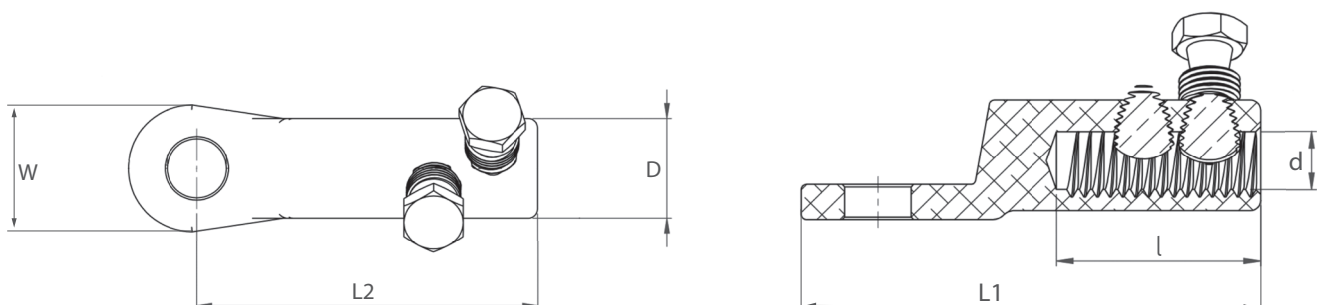

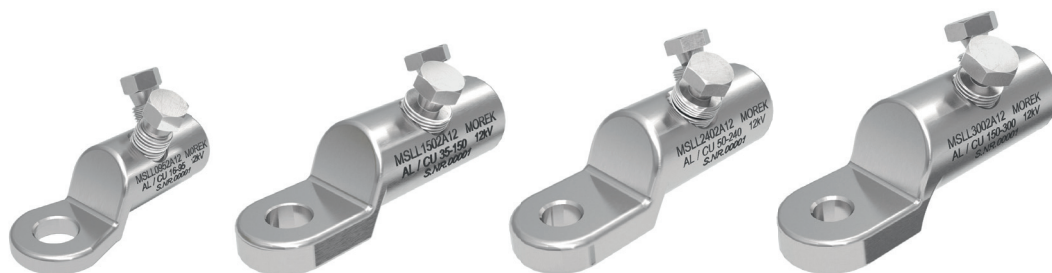

Palm opening size	MSLL96	MSLL150	MSLL240	MSLL300
M10	-	-	-	-
M12	MSLL0952A12	MSLL1502A12	MSLL2402A12	MSLL3002A12
M16	-	-	MSLL2402A16	MSLL3002A16

Technical data

Conductor cross-section Al (mm²)

RE 	Round, solid	16 - 95	35 - 150	50 - 240	120 - 300
RM 	Round, stranded	16 - 95	35 - 150	50 - 240	120 - 300
SE 	Sector shaped, solid	35 - 95	35 - 150	50 - 240	120 - 300
SM 	Sector shaped, stranded	35 - 95	35 - 120	50 - 240	120 - 300


Conductor cross-section Cu (mm²)

RM 	Round, stranded	16 - 95	35 - 120	50 - 240	120 - 300
SM 	Sector shaped, stranded	16 - 95	35 - 120	50 - 240	120 - 300
RE 	Round, solid	16 - 35	35	-	-

No. of bolts Ø mm	2 / M12	2 / M16	2 / M18	2 / M22
Material of bolts	Al	Al	Al	Al
L1 / L2 / l	76 / 63 / 32	100 / 85 / 52	115 / 97 / 57	123 / 104 / 59
W / D / d	25 / 25 / 15	29 / 29 / 18	35 / 35 / 22	38 / 38 / 24,5
Weight (g)	82	120	250	280
Package (pcs)	25	40	15	10


Suitable for aluminium and copper applications

Dimensions

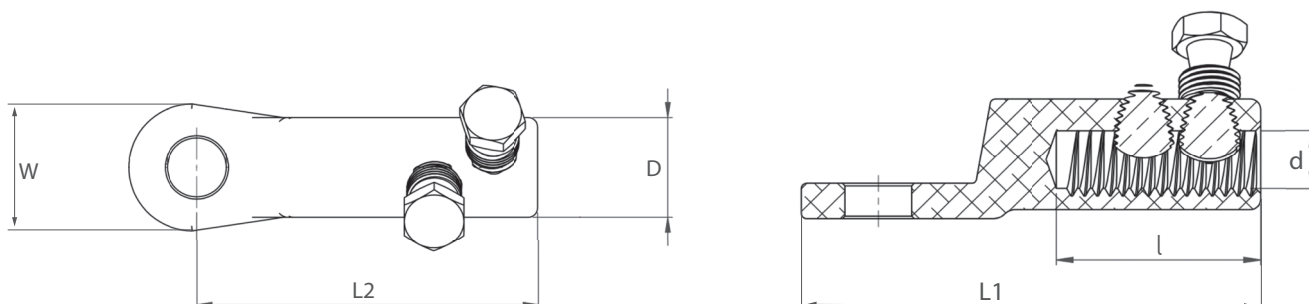

Shear Bolt Cable Connectors up to 12 kV

Shear Bolt connectors for joining aluminium or copper conductors, rated up to 12 kV. Also suitable for low-voltage applications (0,6/1 kV).

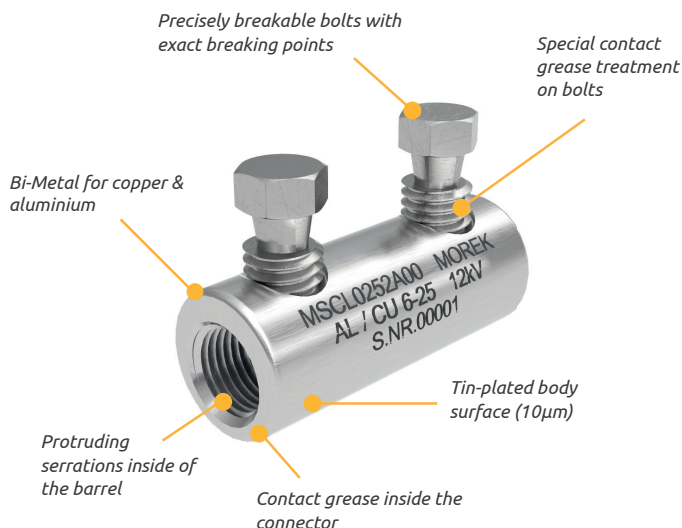

Morek's **Shear Bolt Cable Connectors** provide a secure and efficient solution for joining aluminum or copper conductors tested in applications up to 12kV. Utilizing shear bolt technology, these connectors enable installation without the need for crimping, using only a standard wrench or spanner. Constructed from high-strength, tin-plated aluminum alloy, Morek's shear bolt connectors offer excellent electrical and mechanical performance, making them suitable for a range of conductor sizes and configurations.

Morek's Shear Bolt Cable Connectors combine ease of installation with robust performance, providing an efficient solution for joining conductors without specialized tools. Backed by industry-standard certifications and built for durability, they meet the demands of industrial and distribution networks.

Compliance: Certified to EN 61238-1 Class A, ensuring suitability for applications requiring heat cycle and short-circuit resistance.

Easy Installation with Shear Bolt Technology:

Allows for quick and tool-free installation with basic tools, no crimping required.

Versatile Range-Taking Design:

Supports varying conductor cross-sections, reducing the need for multiple connector sizes.

Durable Materials:

Made of high-strength, tin-plated aluminum alloy, suitable for both aluminum and copper conductors.

Optimal Electrical Connection:

Shear bolts break at the exact torque required for reliable electrical performance.


Antioxidation Protection:

Treated with antioxidation grease to prevent corrosion and oxidation, ensuring long-lasting performance.

Indoor and Outdoor Compatibility:

Suitable for installations in diverse environments, supporting solid, stranded, sector-shaped, and round conductors with plastic or oil-impregnated insulation.

Tested according to IEC 61238-1 Class A, these connectors are ideal for electrical distribution and industrial networks where high short-circuit intensity may occur. Compactly designed, they also minimize required installation space, particularly advantageous for larger cable sizes.

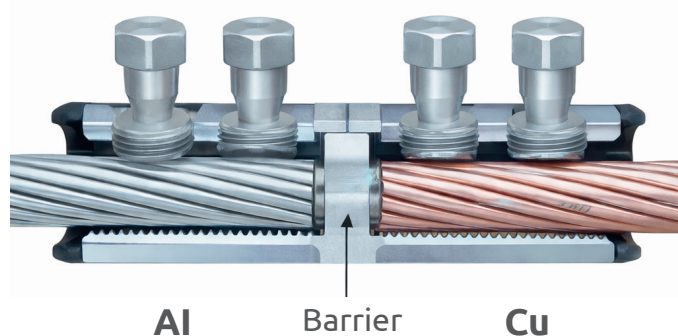



MSCL16



MSCL25



MSCL50



MSCL95

	MSCL0162B00	MSCL0252A00	MSCL0502A00	MSCL0952A00
--	-------------	-------------	-------------	-------------

Technical data

Conductor cross-section Al (mm²)

RE 	Round, solid	1,5 - 16	10 - 35	10 - 50	25 - 95
RM 	Round, stranded	1,5 - 16	10 - 35	10 - 50	25 - 95
SE 	Sector shaped, solid	-	35	35 - 50	35 - 95
SM 	Sector shaped, stranded	-	35	35 - 50	35 - 95

Conductor cross-section Cu (mm²)



RM 	Round, stranded	1,5 - 16	10 - 35	6 - 50	25 - 95
SM 	Sector shaped, stranded	1,5 - 16	10 - 35	6 - 50	25 - 95
RE 	Round, solid	1,5 - 16	6 - 25	6 - 35	25 - 35

No. of bolts Ø mm	2 / M6	2 / M8	2 / M10	2 / M12
Material of bolts	Brass	Al	Al	Al
L / l	30 / 14	40 / 17	37 / 17	54 / 24
D / d	12 / 6	16 / 9	18 / 10	25 / 14
Weight (g)	10	22	26	47
Package (pcs)	100	100	50	50

Suitable for aluminium and copper applications

Connector has inner parier to separate aluminium and copper conductors

Dimensions

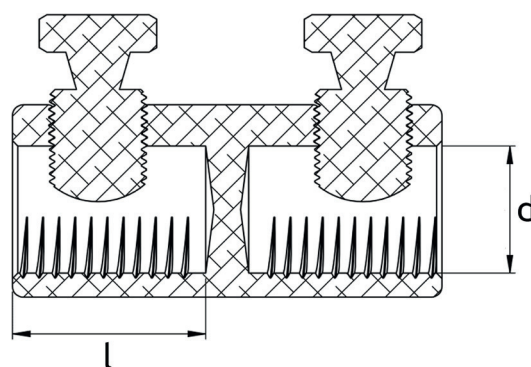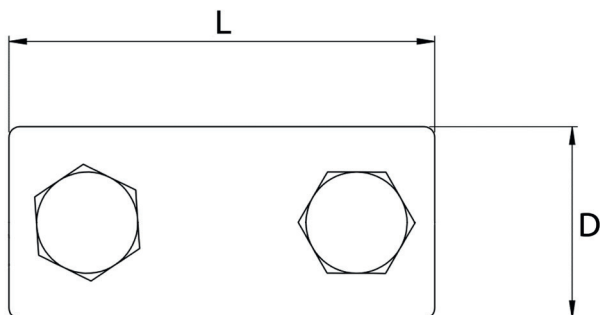



MSCL150

MSCL240

MSCL241

MSCL300

	MSCL1502A00	MSCL2402A00	MSCL2404A00	MSCL3004A00
--	-------------	-------------	-------------	-------------

Technical data

Conductor cross-section Al (mm²)

RE	 Round, solid	25 - 150	120 - 240	50 - 240	150 - 300
RM	 Round, stranded	25 - 150	120 - 240	50 - 240	150 - 300
SE	 Sector shaped, solid	35 - 150	120 - 240	50 - 240	150 - 300
SM	 Sector shaped, stranded	35 - 120	120 - 240	50 - 240	150 - 300

Conductor cross-section Cu (mm²)



RM	 Round, stranded	25 - 150	120 - 240	50 - 240	150 - 300
SM	 Sector shaped, stranded	25 - 150	120 - 240	50 - 240	150 - 300
RE	 Round, solid	25 - 35	-	-	-

No. of bolts Ø mm	2 / M16	2 / M18	4 / M18	4 / M22
Material of bolts	Al	Al	Al	Al
L / l	70 / 30	80 / 32	120 / 56	112 / 52
D / d	28 / 17	38 / 24	35 / 22	38 / 22
Weight (g)	87	162	220	265
Package (pcs)	35	25	20	20

Suitable for aluminium and copper applications


Connector has inner parier to separate aluminium and copper conductors

Dimensions

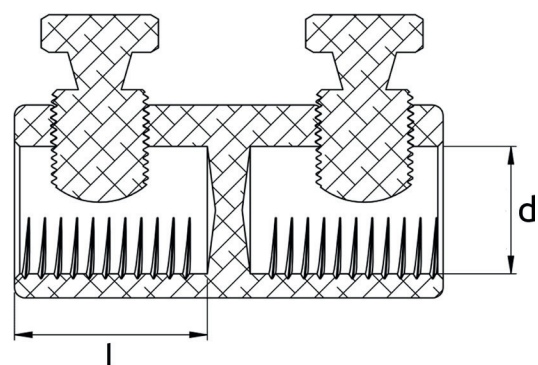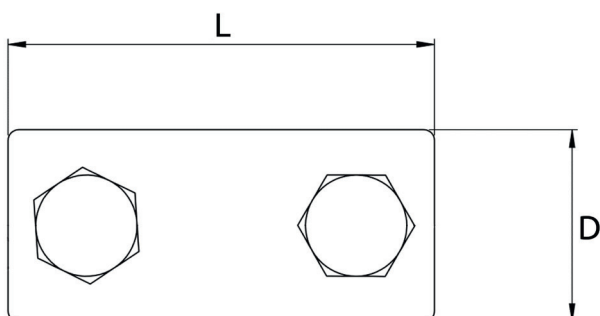

Shear Bolt Cable Lugs up to 36kV

Shear Bolt lugs are used for terminating aluminium or copper conductors in applications up to 36kV. May also be used for 1kV applications.

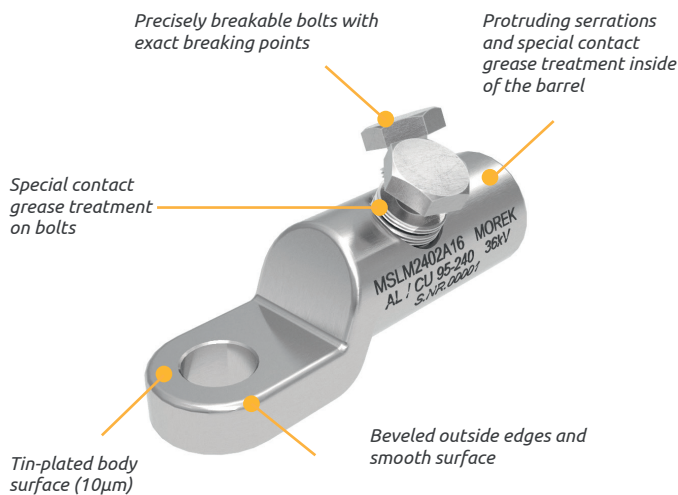

Morek's **Shear Bolt Cable Lugs** are engineered to provide secure and efficient termination for aluminum and copper conductors in high-voltage applications up to 36kV. Utilizing advanced shear bolt technology, these lugs can be installed with a standard wrench or spanner, eliminating the need for specialized crimping tools. Made from high-strength, tin-plated aluminum alloy, Morek's lugs offer excellent conductivity and durability, along with a watertight seal for both indoor and outdoor installations.

Morek's Shear Bolt Cable Lugs up to 36kV offer a reliable, easy-to-install solution that requires no special tools. Built to withstand high-intensity demands, these lugs deliver lasting performance and compatibility, meeting the needs of industrial and distribution networks.

Compliance: Certified to EN 61238-1 Class A, suitable for applications with high short-circuit intensity.

Easy Installation with Shear Bolt Technology:

Allows tool-free installation using basic tools, ensuring a secure connection without crimping.

Range-Taking Design:

Accommodates a wide range of conductor cross-sections, minimizing the need for multiple lug sizes.

High-Strength Materials:

Constructed from tin-plated aluminum alloy, suitable for aluminum and copper conductors, providing durability and conductivity.

Precise Torque for Optimal Connection:

Shear bolts break at the exact torque required for reliable electrical performance.

AntiOxidation Grease Treatment:

Both bolts and lug barrels are coated with antioxidation grease to prevent corrosion and ensure clean electrical contact.

Indoor and Outdoor Compatibility:

Designed for various conductor shapes and insulation types, supporting solid, stranded, sector-shaped, and round conductors with plastic or oil-impregnated paper isolation.

Certified according to IEC 61238-1 Class A, these lugs meet stringent standards for short-circuit and heat cycle resistance, making them ideal for electrical distribution and industrial networks with high-intensity short circuits.



Palm opening size	MSLM95	MSLM150	MSLM240	MSLM300
M12	MSLM0951A12	MSLM1501A12	MSLM2402A12	MSLM3002A12
M16	-	-	MSLM2402A16	MSLM3002A16
M20	-	-	-	-

Technical data

Conductor cross-section Al (mm²)

RE 	Round, solid	16 - 95	50 - 150	95 - 240	120 - 300
RM 	Round, stranded	16 - 95	50 - 150	95 - 240	120 - 300
SM 	Sector shaped, stranded	25 - 70	50 - 120	95 - 185	120 - 240



Conductor cross-section Cu (mm²)

RM 	Round, stranded	16 - 70	35 - 120	95 - 240	120 - 300
SM 	Sector shaped, stranded	25 - 70	50 - 120	95 - 185	120 - 240

No. of bolts Ø mm	1 / M12	1 / M14	2 / M18	2 / M22
Material of bolts	Al	Al	Al	Al
L1 / L2 / l	76 / 60 / 32	95 / 78 / 42	112 / 95 / 57	125 / 105 / 67
W / D / d	32 / 24 / 14	29 / 29 / 16	33 / 33 / 20	38 / 38 / 24,5
Weight (g)	60	122	182	246
Package (pcs)	25	25	15	14

Suitable for aluminium and copper applications

Dimensions

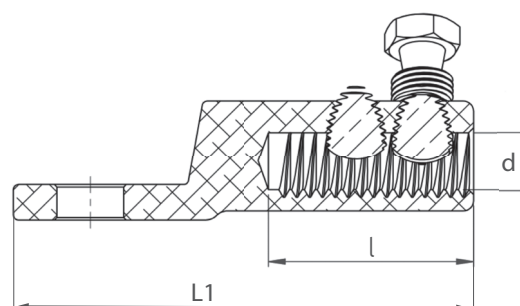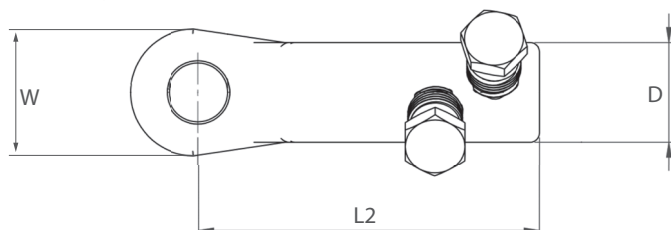



Palm opening size	MSLM400	MSLM630	MSLM1000
M12	MSLM4003A12	MSLM6303A12	-
M16	MSLM4003A16	MSLM6303A16	MSLM10004A16
M20	-	-	MSLM10004A20
2 x M12	-	-	-

Technical data

Conductor cross-section Al (mm²)

RE  Round, solid	185 - 400	400 - 630	630 - 1000
RM  Round, stranded	185 - 400	400 - 630	630 - 1000
SM  Sector shaped, stranded	185 - 300	400 - 500	-


Conductor cross-section Cu (mm²)

RM  Round, stranded	185 - 400	400 - 630	630 - 1000
SM  Sector shaped, stranded	185 - 300	400 - 500	-

No. of bolts Ø mm	3 / M22	3 / M22	4 / M22 long
Material of bolts	Al	Al	Al
L1 / L2 / l	140 / 120 / 79	163 / 136 / 94	194 / 161 / 105
W / D / d	42 / 42 / 26	52 / 52 / 34	65 / 65 / 41
Weight (g)	367	605	1095
Package (pcs)	10	6	3

Suitable for aluminium and copper applications

Dimensions

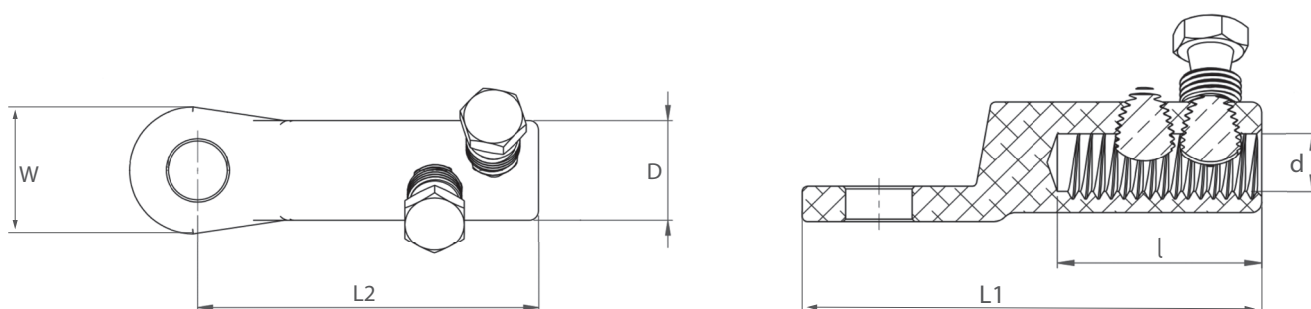



Palm opening size

MSLM400

MSLM630

MSLM1000

M12 x 20 x 2

MSLM4003A32

MSLM6303A32

MSLM10004A32

Technical data

Conductor cross-section Al (mm²)

RE 	Round, solid	185 - 400	400 - 630	630 - 1000
RM 	Round, stranded	185 - 400	400 - 630	630 - 1000
SM 	Sector shaped, stranded	185 - 300	400 - 500	630 - 800



Conductor cross-section Cu (mm²)

RM 	Round, stranded	185 - 400	400 - 630	630 - 1000
SM 	Sector shaped, stranded	185 - 300	400 - 500	630 - 800

No. of bolts Ø mm	3 / M22	3 / M22	4 / M22 long
Material of bolts	Al	Al	Al
L1 / l (mm)	180 / 82	205 / 94,5	238 / 106
L2 / L3 / L4 / L5	159 / 153 / 121 / 115	180 / 174 / 142 / 136	207,5 / 200,5 / 165,5 / 158,5
D / d (mm)	42 / 26	52 / 34	65 / 41
Weight (g)	395	655	1200
Package (pcs)	10	6	3


Suitable for aluminium and copper applications

Dimensions

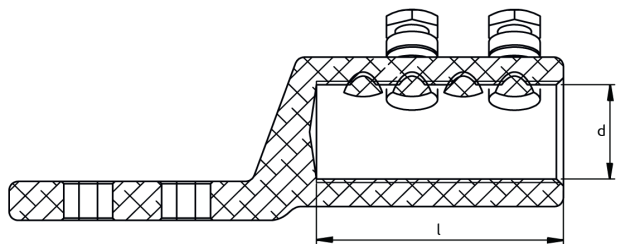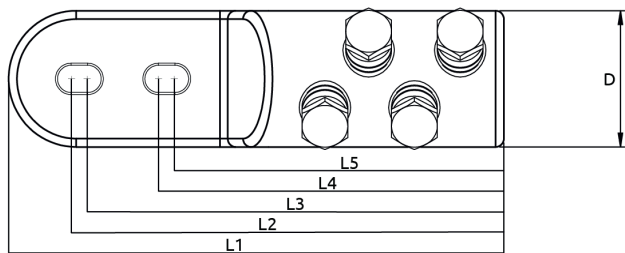

Shear Bolt Cable Connectors up to 36kV

Shear Bolt connectors are used for joining aluminium or copper conductors in applications up to 36kV. May also be used for 1kV applications.

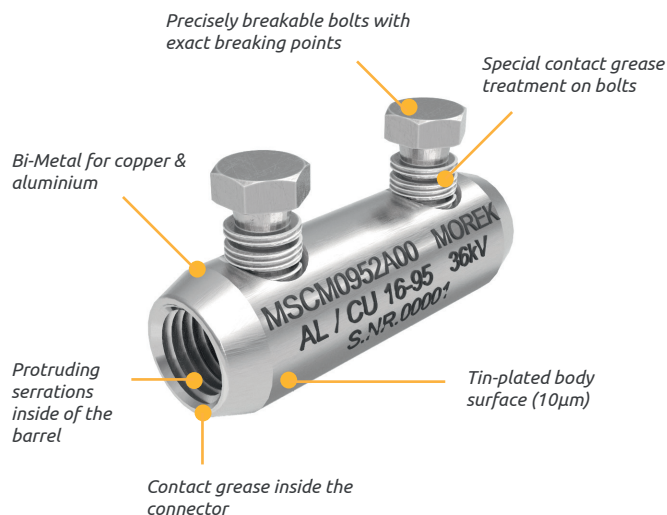

Morek's Shear Bolt Cable Connectors provide a robust and efficient solution for joining aluminum and copper conductors in high-voltage applications up to 36kV. Utilizing shear bolt technology, these connectors enable secure connections using only a standard wrench or spanner, eliminating the need for crimping tools. Constructed from high-strength, tin-plated aluminum alloy, Morek's connectors ensure exceptional conductivity and durability, suitable for both indoor and outdoor installations.

Morek's Shear Bolt Cable Connectors up to 36kV offer a practical and reliable solution for high-voltage connections, requiring no specialized tools. Built to withstand demanding conditions, these connectors provide dependable performance, supported by industry-standard certifications for high short-circuit and heat cycle resistance.

Compliance: Certified to EN 61238-1 Class A, suitable for applications that demand short-circuit durability and high electrical performance.

Tool-Free Shear Bolt Technology:

Allows for easy installation without the need for crimping, using only a wrench or spanner.

Range-Taking Design:

Supports a broad range of conductor cross-sections, reducing the need for multiple connector sizes.

Durable Material Composition:

Made from high-strength, tin-plated aluminum alloy, ensuring compatibility with both aluminum and copper conductors.


Precise Torque Control for Optimal Connection:

Shear bolts break at the exact torque required for reliable electrical performance.

AntiOxidation Grease Treatment:

Bolts and connector barrels are treated with antioxidation grease, preventing corrosion and maintaining clean electrical contact.

These connectors are tested according to IEC 61238-1 Class A standards, making them suitable for use in electrical distribution and industrial networks that experience high short-circuit intensities. Their compact design and compatibility with a range of termination kits ensure flexible, efficient installation across a variety of applications.

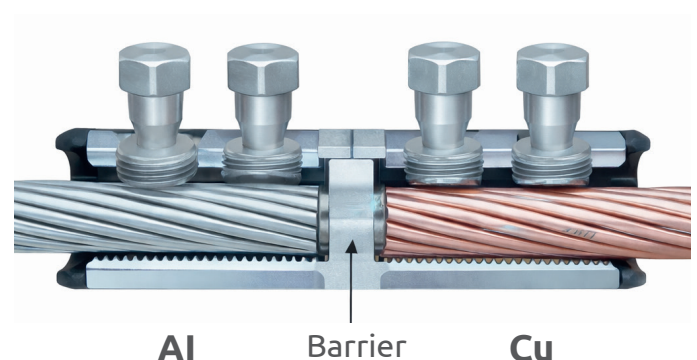



MSCM95

MSCM150

MSCM240

MSCM300

	MSCM0952A00	MSCM1502A00	MSCM2404A00	MSCM3004A00
--	-------------	-------------	-------------	-------------

Technical data

Conductor cross-section Al (mm²)

RE 	Round, solid	16 - 95	50 - 150	95 - 240	120 - 300
RM 	Round, stranded	16 - 95	50 - 150	95 - 240	120 - 300
SM 	Sector shaped, stranded	25 - 70	50 - 120	95 - 185	120 - 240

Conductor cross-section Cu (mm²)



RM 	Round, stranded	16 - 95	35 - 150	95 - 240	120 - 300
SM 	Sector shaped, stranded	25 - 70	50 - 120	95 - 185	120 - 240

No. of bolts Ø mm	2 / M12	2 / M14	4 / M18	4 / M22
Material of bolts	Al	Al	Al	Al
L / l	70 / 33	80 / 35	120 / 56	142 / 67
D / d	24 / 12,5	30 / 15,5	33 / 20	38 / 24,5
Weight (g)	74	146	230	400
Package (pcs)	30	25	15	10

Suitable for aluminium and copper applications

Connector has inner parier to separate aluminium and copper conductors

Dimensions

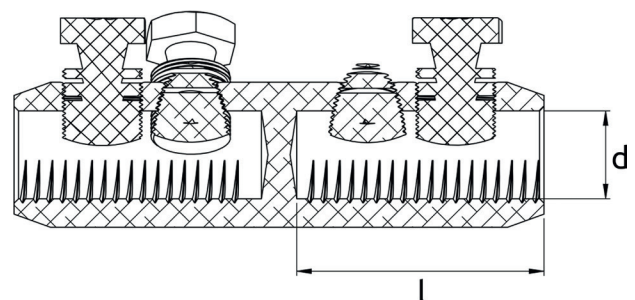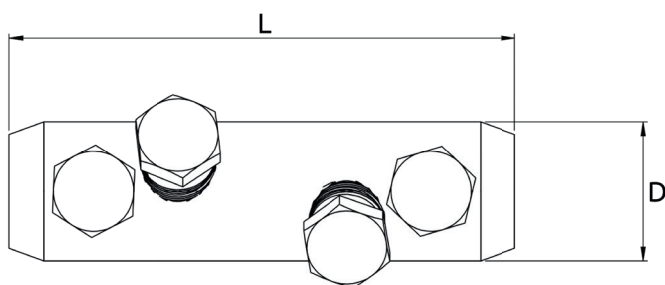



MSCM400


MSCM630

MSCM1000

	MSCM4006A00	MSCM6306A00	MSCM10008A00
Technical data			
Conductor cross-section Al (mm ²)			
RE  Round, solid	185 - 400	400 - 630	630 - 1000
RM  Round, stranded	185 - 400	400 - 630	630 - 1000
SM  Sector shaped, stranded	185 - 300	400 - 500	-
Conductor cross-section Cu (mm ²)			
RM  Round, stranded	185 - 400	400 - 630	630 - 1000
SM  Sector shaped, stranded	185 - 300	400 - 500	-
No. of bolts Ø mm	6 / M22	6 / M22	8 / M22 long
Material of bolts	Al	Al	Al
L / l	170 / 82	200 / 94	220 / 105
D / d	42 / 25,5	52 / 34	65 / 41
Weight (g)	580	815	1340
Package (pcs)	5	3	2

Suitable for aluminium and copper applications
Connector has inner parier to separate aluminium and copper conductors

Dimensions

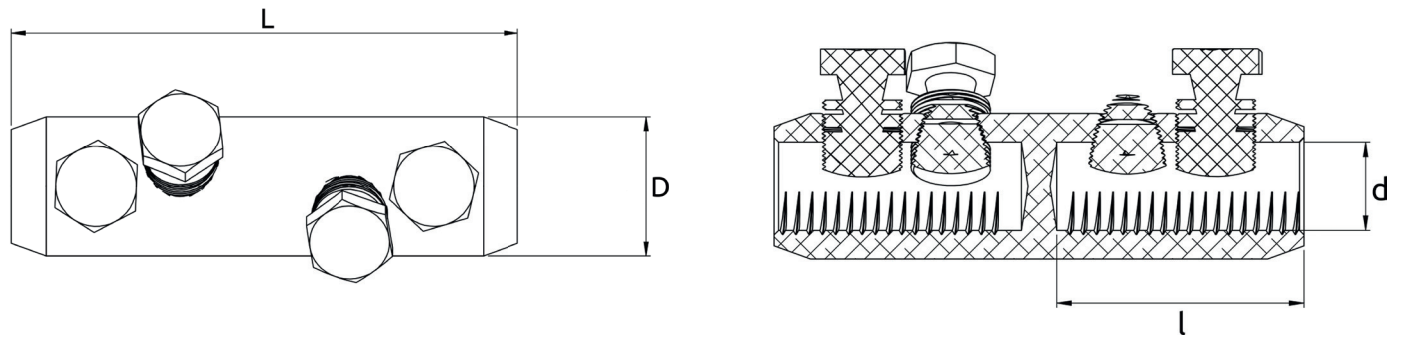

Clamp device for screw connectors

Morek shearbolt installation tool for holding screw connectors.

For fastening and easy installation of insulated and bare connectors with a diameter of 14 to 40 mm. Insulation according to CEI / EN 60900: 2004. Application also of very low temperatures down to -40 °C.

Morek shearbolt installation tool

	MSCLTOOLB01
Technical data	
Clamping range (mm)	14 - 40
Color design	black
Material	Polyamid (PA)
Weight (g)	816
Package (pcs)	1



Heat-shrink Tubing, Breakouts and End Cups

Selection
of reliable,
high-quality
products

Safe and
efficient
electrical
connections

for any installation



The product portfolio includes medium and heavy-wall tubing, thin-wall tubing. Each product reflects Morek's commitment to quality, innovation, and ease of use.

All products are crafted from durable materials and meet industry standards, allowing professionals to work with dependable solutions in both indoor and outdoor environments. Every connection made with Morek products represents quality and assurance, developed and tested for long-term durability.

Thinwall Heat-shrink Tubing

Insulation and Protection for Low Voltage Cables.



The **MTW Thinwall Heat-shrink Tubing** by Morek provides reliable insulation and protection for low-voltage cables and components. This versatile tubing is crafted from cross-linked polyolefin, offering flexibility, durability, and ease of installation, ideal for applications that demand a balance of protection and minimal added bulk. UV-stabilized (black version) and available in various colors, including yellow/green, MTW tubing supports a range of environments and visual coding needs.

Morek's MTW Thinwall Heat-shrink Tubing represents our commitment to quality, flexibility, and innovation, offering customers a dependable solution for various electrical insulation needs. With consistent performance and industry compliance, Morek's MTW tubing is an essential choice for professionals seeking efficient and lasting cable protection.

High Electrical and Mechanical Strength:

Delivers reliable insulation and stability for low-voltage applications.

Thinwall, Durable Construction:

UV-stabilized Thinwall polyolefin (black version) provides effective protection against radiation and weathering.

Safe and Environmentally Friendly:

Halogen-free, silicone-free, and free from lead and aluminum, ensuring a non-corrosive, non-toxic solution.

Compliance and Versatile Design:

Meets RoHS and REACH regulations and is available in black and various colors upon request, supporting versatile installation needs.

Extended Shelf Life:

Unlimited shelf life under normal storage conditions.

Available in black, yellow/green, and other colors, ideal for color-coded cable installations in both indoor and outdoor settings.

Compliance: CENELEC EN50655

Dimensions



MTW Thinwall Heat-shrink Tubing

1m length order code	Full coil order code	Size (mm)	As supplied (mm)	After recovered (mm)		Full coil length (m)
			D (Min.)	d (Max.)	w (Min.)	
MTWA01206 B11	MTWA01206 B10	1,2/0,6	1,2	0,6	0,33	200
MTWA01608 B11	MTWA01608 B10	1,6/0,8	1,6	0,8	0,36	200
MTWA02412 B11	MTWA02412 B10	2,4/1,2	2,4	1,2	0,42	200
MTWA03216 B11	MTWA03216 B10	3,2/1,6	3,2	1,6	0,42	200
MTWA04824 B11	MTWA04824 B10	4,8/2,4	4,8	2,4	0,52	100
MTWA06432 B11	MTWA06432 B10	6,4/3,2	6,4	3,2	0,54	100
MTWA08040 B11	MTWA08040 B10	8,0/4,0	8,0	4,0	0,54	100
MTWA09548 B11	MTWA09548 B10	9,5/4,8	9,5	4,8	0,54	100
MTWA12764 B11	MTWA12764 B10	12,7/6,4	12,7	6,4	0,62	100
MTWA16080 B11	MTWA16080 B10	16,0/8	16,0	8,0	0,67	100
MTWA19095 B11	MTWA19095 B10	19,0/9,5	19,0	9,5	0,75	100
MTWA25412 B11	MTWA25412 B10	25,4/12,7	25,4	12,7	0,85	50
MTWA31815 B11	MTWA31815 B10	31,8/15,9	31,8	15,9	0,85	50
MTWA38119 B11	MTWA38119 B10	38,1/19,1	38,1	19,1	0,96	50
MTWA50825 B11	MTWA50825 B10	50,8/25,4	50,8	25,4	0,97	25
MTWA60030 B11	MTWA60030 B10	60,0/30,0	60,0	30,0	1,10	25
MTWA76238 B11	MTWA76238 B10	76,2/38,1	76,2	38,1	1,17	25
MTWA10150 B11	MTWA10150 B10	101,6/50,8	101,6	50,8	1,30	25
MTWA12060 B11	MTWA12060 B10	120,0/60,0	120,0	60,0	1,30	25
MTWA15276 B11	MTWA15276 B10	152,4/76,2	152,4	76,2	1,30	15

List of products MTW available in different colors

Available colors		For the colour version replace the third letter from the end in the ordering code
	Black	B (B10/B11)
	Clear	C (C10/C11)
	Blue	N (N10/N11)
	Green	G (G10/B11)
	Red	R (R10/R11)
	Yellow/Green	X (X10/X11)

Other colors and lengths upon request.

Mediumwall Heat-shrink Tubing

Insulation and core protection for low and medium voltage cables.



Morek's **MMWT Heat-shrink Tubing** is engineered to provide top-quality insulation, protection, and sealing for low-voltage cable accessories and electrical components. This Mediumwall, cross-linked polyolefin tubing is ideal for low and medium voltage cables, delivering robust mechanical strength and exceptional electrical properties.

The MMWT tubing offers a durable solution that withstands UV radiation, weathering, and environmental pollutants, making it well-suited for both indoor and outdoor applications, including offshore environments.

Compliance: CENELEC EN50655

Reliable Electrical and Mechanical Strength:

Ensures stable insulation and protection for low-voltage applications.

Durable Material Composition:

UV-stabilized, halogen-free, and silicone-free, with non-corrosive, non-toxic properties, and free from lead and aluminum.

Adhesive Options:

Available with or without a hot-melt adhesive coating to suit various sealing and moisture-proofing needs.

Compliance and Approvals:

Meets RoHS and REACH regulations and is approved for offshore applications, ensuring environmentally responsible and safe usage.



High Shrink Ratio and Color:

Black, with a 3:1 shrink ratio, enabling a tight, secure fit over various cable sizes and shapes.

Extended Shelf Life:

Unlimited shelf life under normal storage conditions.

Dimensions

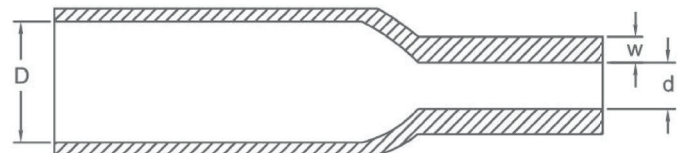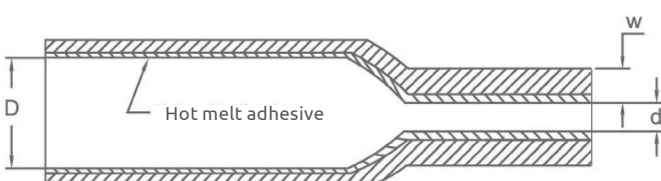

MMWT Mediumwall tubing with adhesive

Order code	Size (mm)	As supplied (mm)	After recovered (mm)		Standard Length (mm)
		D (Min.)	d (Max.)	w (Min.)	
MMWT00802A10	8/2	8	2	1,8	1000
MMWT01203A10	12/3	12	3	1,8	1000
MMWT01905A10	19/5	19	5	2,0	1000
MMWT02206A10	22/6	22	6	2,4	1000
MMWT02806A15	28/6	28	6	2,7	1000
MMWT03308A10	33/8	33	8	2,7	1000
MMWT04012A10	40/12	40	12	2,7	1000
MMWT05516A10	55/16	55	16	2,7	1000
MMWT06519A10	65/19	65	19	2,9	1000
MMWT07522A10	75/22	75	22	3,0	1000
MMWT09525A10	95/25	95	25	3,5	1000
MMWT11534A10	115/34	115	34	3,5	1000
MMWT14042A10	140/42	140	42	3,5	1000

MMWT Mediumwall tubing without adhesive

Order code	Size (mm)	As supplied (mm)	After recovered (mm)		Standard Length (mm)
		D (Min.)	d (Max.)	w (Min.)	
MMWT00802U10	8/2	8	2	1,7	1000
MMWT01203U10	12/3	12	3	1,7	1000
MMWT01905U10	19/5	19	5	2,0	1000
MMWT02206U10	22/6	22	6	2,4	1000
MMWT02806U10	28/6	28	6	2,6	1000
MMWT03308U10	33/8	33	8	2,6	1000
MMWT04012U10	40/12	40	12	2,6	1000
MMWT05516U10	55/16	55	16	2,7	1000
MMWT06519U10	65/19	65	19	2,9	1000
MMWT07522U10	75/22	75	22	3,0	1000
MMWT09525U10	95/25	95	25	3,1	1000
MMWT11534U10	115/34	115	34	3,2	1000
MMWT14042U10	140/42	140	42	3,2	1000
MMWT16050U10	160/50	160	50	3,2	1000
MMWT18058U10	180/58	180	58	3,3	1000
MMWT20055U10	200/55	200	55	3,7	1000

Heavywall Heat-shrink Tubing

Insulation and Outer Sealing for Low and Medium Voltage Cables



The **MHWT Heavywall Heat-shrink Tubing** by Morek is designed for robust insulation, protection, and re-jacketing of low, medium, and high-voltage cables and accessories. This Heavywall tubing is crafted from durable, cross-linked polyolefin, combining electrical and mechanical properties to withstand demanding environments and ensure reliable performance in both indoor and outdoor installations, including offshore applications.

With Morek's MHWT tubing, customers gain a reliable, high-quality solution that meets industry standards for safety and durability. Backed by our commitment to quality and customer support, MHWT tubing ensures effective insulation and protection across various applications.

Compliance: CENELEC EN50655

Superior Electrical and Mechanical Strength:

Ensures reliable insulation for low-voltage applications, offering stability and protection.

Heavywall Material Composition:

Thick, UV-stabilized polyolefin provides exceptional durability against radiation and weathering.

Safe and Non-Toxic:

Halogen-free, silicone-free, and free from lead and aluminum, offering a non-corrosive, non-toxic option.

Adaptable Adhesive Options:

Available with or without an internal hot-melt adhesive coating for customized sealing needs.

Compliance and Approvals:

RoHS and REACH compliant, suitable for offshore environments.


High Shrink Ratio and Versatile Design:

Black with a high shrink ratio, fitting securely over various cable sizes and irregular shapes.

Extended Shelf Life:

Unlimited shelf life under normal storage conditions.

Dimensions

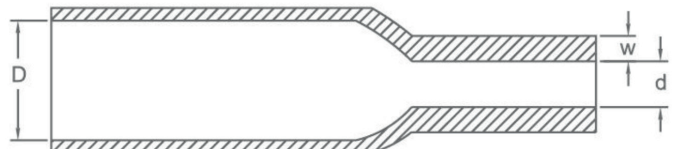

MHWT Heavywall tubing with adhesive

Order code	Size (mm)	As supplied (mm)	After recovered (mm)		Standard Length (mm)
		D (Min.)	d (Max.)	W (Min.)	
MHWT00903A10	9/3	9	3	2	1000
MHWT01605A10	16/5	16	5	2,4	1000
MHWT01905A10	19/5	19	5	2,4	1000
MHWT02206A10	22/6	22	6	2,7	1000
MHWT03308A10	33/8	33	8	3,2	1000
MHWT04012A10	40/12	40	12	4	1000
MHWT05516A10	55/16	55	16	4	1000
MHWT06519A10	65/19	65	19	4	1000
MHWT07522A10	75/22	75	22	4	1000
MHWT09525A10	95/25	95	25	4,2	1000
MHWT10529A10	105/29	105	29	4,2	1000
MHWT11534A10	115/34	115	34	4,2	1000
MHWT13036A10	130/36	130	36	4,2	1000
MHWT14042A10	140/42	140	42	4,2	1000
MHWT16050A10	160/50*	160	50	4,2	1000
MHWT18058A10	180/58*	180	58	4,2	1000

MHWT Heavywall tubing without adhesive

Order code	Size (mm)	As supplied (mm)	After recovered (mm)		Standard Length (mm)
		D (Min.)	d (Max.)	W (Min.)	
MHWT00903U10	9/3	9	3	2,0	1000
MHWT01605U10	16/5	16	5	2,4	1000
MHWT01905U10	19/5	19	5	2,4	1000
MHWT02206U10	22/6	22	6	2,7	1000
MHWT03308U10	33/8	33	8	3,2	1000
MHWT04012U10	40/12	40	12	3,7	1000
MHWT05516U10	55/16	55	16	3,7	1000
MHWT06519U10	65/19	65	19	3,7	1000
MHWT07522U10	75/22	75	22	3,7	1000
MHWT09525U10	95/25	95	25	3,7	1000
MHWT10529U10	105/29	105	29	4,0	1000
MHWT11534U10	115/34	115	34	4,0	1000
MHWT13036U10	130/36	130	36	4,0	1000
MHWT14042U10	140/42	140	42	4,0	1000
MHWT16050U10	160/50	160	50	4,0	1000
MHWT13036U10	180/58	180	50	4,1	1000

Heat-shrink Low Voltage Breakouts

Heat-shrink Low voltage breakouts up to 1kV



Morek's **Heat-shrink Low Voltage Breakouts** are designed to provide reliable insulation and sealing for multi-core cables up to 1kV. Engineered for durability, these breakouts are made from thermally stabilized, cross-linked polyolefin, blended with synthetic rubber to deliver excellent electrical insulation, UV resistance, and weatherproofing. The black-colored breakouts are available with two, three, four, or five fingers, each coated with either a polyamide-based hot melt adhesive or rubber mastic (upon request), ensuring a watertight environmental seal.

With Morek's Heat-shrink Low Voltage Breakouts, customers receive a product that meets high standards of quality, durability, and flexibility. Ideal for a wide range of low-voltage applications, these breakouts ensure that cables remain secure, insulated, and sealed against moisture and environmental factors.

Reliable Electrical Insulation:

Designed for low voltage (up to 1kV) applications, providing essential insulation for cable crutches.

Durable and UV Resistant:

Constructed from UV-stabilized, cross-linked polyolefin, protecting against environmental degradation.

Customizable Sealing Options:

Spiral-coated with polyamide hot melt adhesive for secure sealing; rubber mastic coating available on request.

Material Composition:


Blended with synthetic rubber and fire-retardant additives (optional), with resistance to oxidation, ozone, and other environmental factors.

Efficient Design:

Available in black, with options for two to five fingers to fit various cable configurations.

When heated above 125°C, the LV breakouts shrink to a predetermined size, creating a tight, waterproof seal over the cable crutch. The hot melt adhesive or mastic sealant provides added protection against moisture, making these breakouts an ideal solution for environments where cables require robust, long-lasting insulation.

Dimensions

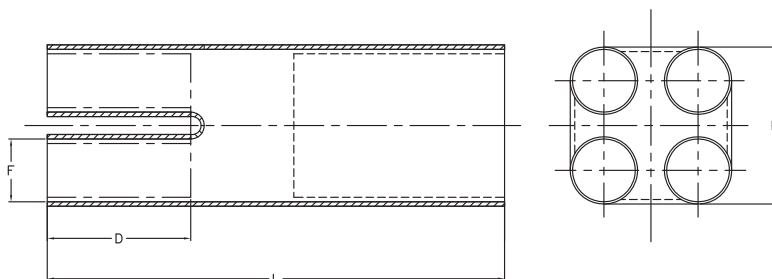

MHLB Heat-shrinkable Low Voltage Breakouts

Order code	Breakout main diameter (H)		Finger Diameter (F)		Full Length	Finger Length
	R* (mm)	S* (mm)	R* (mm)	S* (mm)	L (mm)	D (mm)

LV Breakout 2-Fingers Models

MHLB03310B2	10,0	33,0	3,0	14,0	90,0	20,0
MHLB06022B2	22,0	60,0	6,7	24,0	120,0	35,0

LV Breakout 3-Fingers Models

MHLB02808B3	8,5	28,0	2,5	12,0	70,0	23,0
MHLB04514B3	14,0	45,0	4,0	15,0	110,0	20,0
MHLB06022B3	22,0	60,0	8,0	26,0	185,0	45,0
MHLB08033B3	33,0	80,0	16,0	36,0	210,0	50,0
MHLB11033B3	33,0	110,0	16,0	40,0	210,0	50,0
MHLB11047B3	47,0	110,0	20,0	48,0	225,0	75,0
MHLB12547B3	47,0	125,0	20,0	55,0	250,0	75,0
MHLB14054B3	54,0	140,0	27,0	62,0	240,0	65,0
MHLB15554B3	54,0	155,0	27,0	62,0	240,0	65,0

LV Breakout 4-Fingers Models

MHLB02808B4	8,5	28,0	1,8	10,0	70,0	23,0
MHLB03814B4	14,0	38,0	3,2	15,0	105,0	25,0
MHLB05014B4	14,0	50,0	3,2	15,0	105,0	25,0
MHLB05525B4	25,0	55,0	6,0	20,0	180,0	45,0
MHLB06525B4	25,0	65,0	6,0	25,0	180,0	45,0
MHLB07222B4	22,0	72,0	8,5	25,0	190,0	45,0
MHLB10033B4	33,0	100,0	14,0	35,0	215,0	50,0
MHLB12547B4	47,0	125,0	20,0	45,0	245,0	72,0

LV Breakout 5-Fingers Models

MHLB05015B5	15,0	50,0	3,2	15,0	105,0	30,0
MHLB08033B5	33,0	80,0	9,0	27,0	215,0	60,0
MHLB10233B5	33,0	102,0	9,0	35,0	215,0	60,0

LV Breakout 6-Fingers Model


Order code	Breakout main dia. (H)		Finger F1 Dia.		Finger F2 Dia.		Full Length	Finger Length
	R* (mm)	S* (mm)	R* (mm)	S* (mm)	R* (mm)	S* (mm)	L (mm)	D (mm)
MHLB10033B6	33,0	100,0	6,0	19,0	12,0	38,0	215,0	50,0

* S: As Supplied

R: Fully Recovered

Heat-shrink End Caps

Designed to protect and insulate the unused ends of cables, safeguarding them from environmental effects.

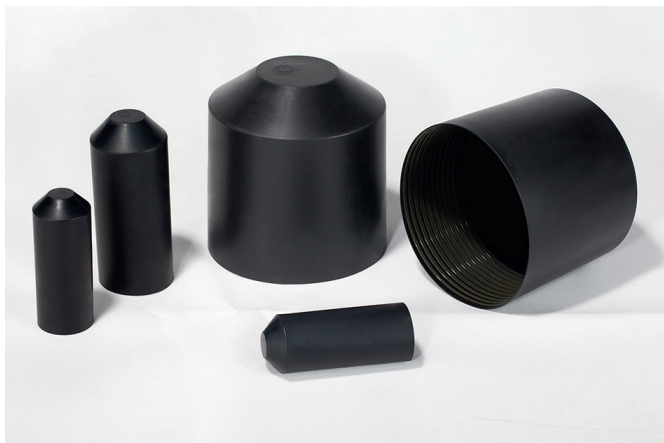

Morek's **MHLC Heat-shrinkable End Caps** are designed to protect and insulate the unused ends of cables, safeguarding them from environmental effects. Constructed from thermally stabilized, cross-linked polyolefin, these end caps offer reliable insulation and are pre-coated with a yellowish, translucent hot melt adhesive for a secure, moisture-resistant seal. Available in both film and spiral coating forms, these end caps can accommodate various cable types, including PVC, XLPE, PILC, and rubber jackets, and are suitable for both pressurized and unpressurized applications.

Morek's MHLC Heat-shrinkable End Caps deliver consistent, high-quality insulation and protection for a wide range of applications. Built for durability and flexibility, they meet stringent industry standards and provide reliable sealing and protection, backed by Morek's commitment to quality and customer satisfaction.

Reliable Insulation and Protection:

Ensures environmental protection and insulation for unused cable ends, preventing damage and exposure.

Durable Composition:

UV-resistant and made from cross-linked polyolefin, providing protection against oxidation, ozone, and harsh conditions.

Versatile Adhesive Options:

Coated with polyamide hot melt adhesive in either film form for pressurized cables or spiral form for unpressurized cables.

Flexible Applications:


Suitable for a wide range of electrical and telecommunications cables, with non-return air valves available for pressurized telecom cables.

Efficient and Secure Design:


Black color with pre-applied adhesive coating, ensuring quick and easy installation.

Upon heating above 125°C, MHLC end caps shrink to form a tight seal over the cable end, providing a barrier against moisture, UV, and other environmental effects. The adhesive layer ensures a strong bond, making these end caps ideal for both industrial and outdoor installations.

Dimensions



RECOVERED END CAP



EXPANDED END CAP

MHLC Heat-shrinkable End Caps

End Cap	End Cap Dimension mm		Cable Diameter (H)	
Order code	EXP-H (mm)	Length (L)	min (mm)	max (mm)
MHLC01003B0	10,0/3,0	35	4	9
MHLC01504B0	15,0/4,5	45	5	13
MHLC02006B0	20,0/6,0	63	7	17
MHLC02508B0	25,0/8,5	70	10	22
MHLC04014B0	40,0/14,5	102	17	35
MHLC04014BX	40,0/14,5	190	17	35
MHLC06324B0	63,0/24,0	118	28	55
MHLC06324BX	63,0/24,0	175	28	55
MHLC07532B0	75,0/32,0	133	37	65
MHLC07532BX	75,0/32,0	175	37	65
MHLC07838B0	78,0/38,0	130	44	70
MHLC10645B0	106,0/45,0	164	52	95
MHLC10057B0	100,0/57,0	155	65	90
MHLC12057B0	120,0/57,0	155	65	110
MHLC14557B0	145,0/57,0	155	65	135

Heat-shrink sets for cables up to 1kV

Suitable for low voltage, high-performance insulation needs.



Morek's **Low Voltage Kits** provide a complete solution for the termination and jointing of cables up to 1kV. Available in two main types—MSLS Termination Kits and MSCS Joint Kits—these heat-shrink sets are designed to facilitate secure, durable connections for both aluminum and copper conductors. Each kit includes all necessary components, such as shear bolt cable lugs, sanding and cleaning materials, and installation instructions, ensuring a straightforward and reliable installation process.

Both the MSLS and MSCS kits are designed for low voltage installations in diverse environments, offering protection and ease of use for contractors and installers working on indoor and outdoor projects.

Certified according to EN61238-1 class A

For Applications up to 1kV:

Engineered to meet the demands of low-voltage cable terminations and joints.

Versatile Compatibility:

Ideal for cables with PVC or XLPE insulation, accommodating 3, 4, or 5 core configurations.

Shear Bolt Cable Lugs:

Included in both kits, compatible with aluminum and copper conductors for reliable connections.

Complete Installation Materials:

Includes sanding and cleaning supplies, ensuring optimal contact surfaces and reliable insulation.

Indoor and Outdoor Use:

Designed to withstand varied environmental conditions, providing flexibility for diverse installations.

Heat-Shrink Technology:

High-quality heat-shrink tubes and terminations ensure secure sealing and simplify the installation process.

MSLS Termination Kits

Order code	Conductor size	Lugs	Qty of cores
MSLS0351A10	Al / Cu 6 - 35 mm ²	4 x MSLL0351A10	4
MSLS0701A12	Al / Cu 25 - 70 mm ²	4 x MSLL0951A12	4
MSLS1202A12	Al / Cu 70 - 120 mm ²	4 x MSLL1502A12	4
MSLS2402A12	Al / Cu 120 - 240 mm ²	4 x MSLL2402A12	4

The **MSLS Termination Kits** are specifically designed for terminating low voltage cables with plastic insulation and an outer plastic sheath. Suitable for both indoor and outdoor use, these kits are available for 3, 4, and 5 core cables and come with high-quality heat-shrink tubes that ensure a secure and reliable seal.

- **Shear Bolt Cable Lugs Included:**

Supports aluminum and copper conductors.

- **Comprehensive Materials:**

Includes sanding and cleaning supplies for optimal contact and sealing.

- **Easy Installation:**

High-quality heat-shrink terminations simplify the process, reducing installation time and effort.

Please contact your Customer Service representative for information on kits for 3 and 5 core cables.



MSCS Joint Kits

Order code	Conductor size	Connectors	Qty of cores
MSCS0162A00	Al / Cu 2,5 - 16 mm ²	4 x MSCL0162A00	4
MSCS0352A00	Al / Cu 6 - 35 mm ²	4 x MSCL0252A00	4
MSCS0502A00	Al / Cu 16 - 50 mm ²	4 x MSCL0502A00	4
MSCS0952A00	Al / Cu 25 - 95 mm ²	4 x MSCL0952A00	4
MSCS1202A00	Al / Cu 70 - 150 mm ²	4 x MSCL1502A00	4
MSCS2404A00	Al / Cu 95 - 240 mm ²	4 x MSCL2404A00	4
MSCS3004A00	Al / Cu 150 - 300 mm ²	4 x MSCL3004A00	4

The **MSCS Joint Kits** enable secure jointing of low voltage cables with plastic insulation and outer sheaths, providing the same reliable sealing as the termination kits. These kits also include shear bolt cable lugs, sanding and cleaning materials, and installation instructions.

- **Bolt Cable Lugs Included:**

Compatible with both aluminum and copper conductors.

- **Heat-Shrink Tubes for Core and Outer Sheath:**

Provides durable insulation for the entire joint, supporting long-term reliability.

- **User-Friendly Assembly:**

Designed for easy handling and secure installation, ensuring dependable connections.

Please contact your Customer Service representative for information on kits for 3 and 5 core cables.



Morek Finland

+358 40 770 8030
myynti@morek.fi

Morek Estonia

+372 6 041 423
morek@morek.ee

Morek Latvia

+371 26 186 699
moreklv@morek.eu

Morek Lithuania

+370 67 382 192
info@morek.lt

Morek Poland

+48 501 642 007
morekpl@morek.eu

Morek Czech Republic

+420 727 939 795
morek@morek.cz

Morek Slovakia

+421 918 159 385
morek@morek.sk

Morek France

+33 7 81 38 34 46
morek@morek.fr

Morek Bulgaria


+420 727 939 795
morek@morek.cz

Morek Portugal

+351 932 221 008
sales@morek.pt

Morek Export

+48 508 028 889
export@morek.eu

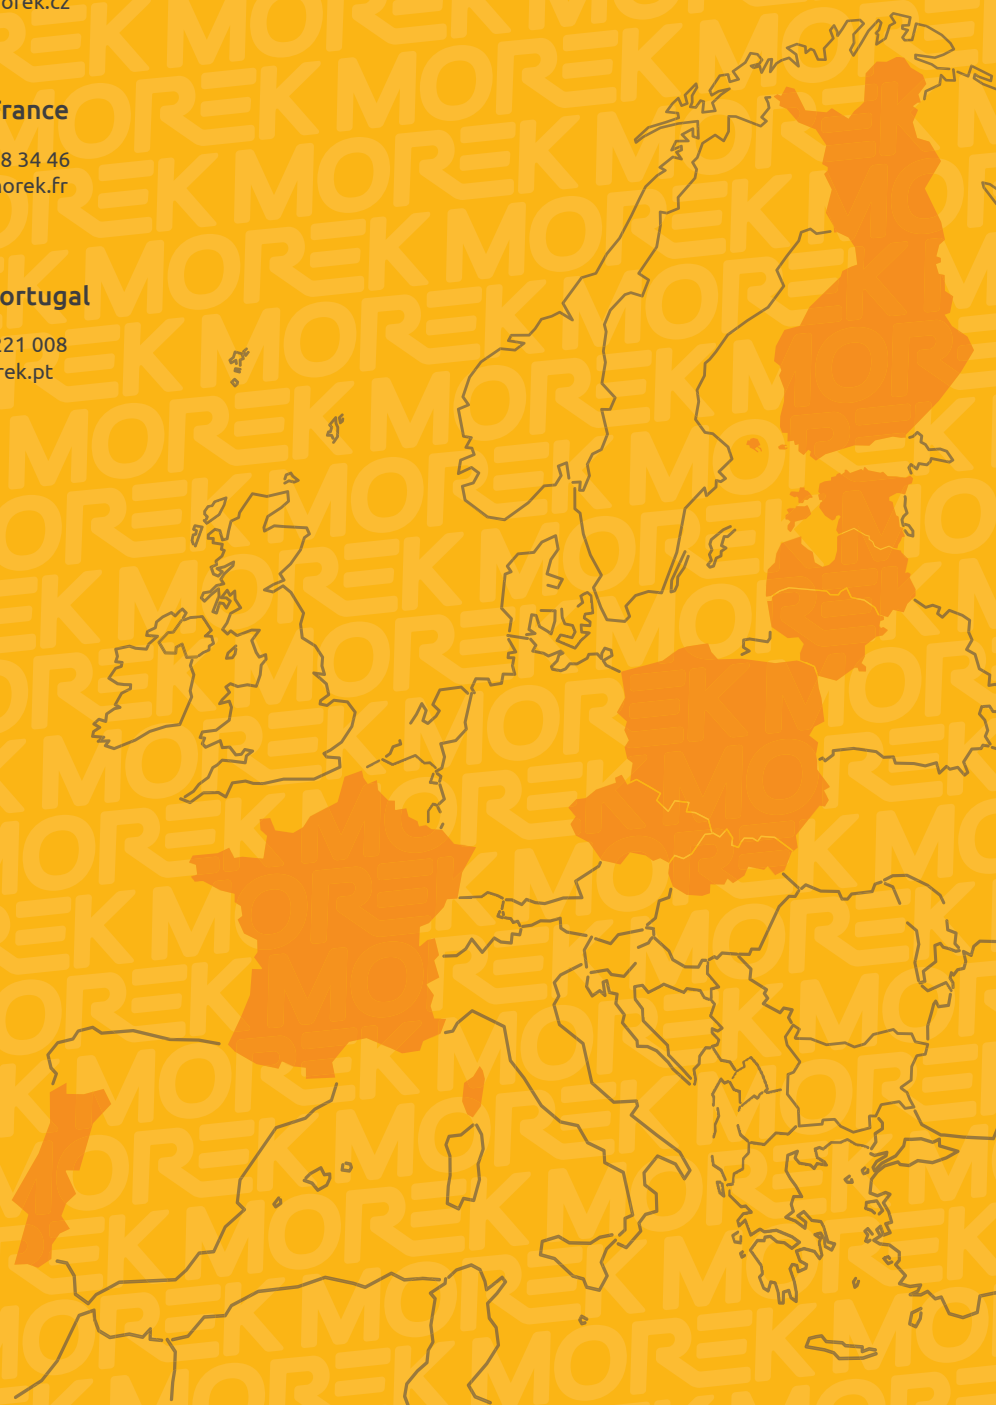**MOREK**